



## SERIES OF SMART GATEWAYS

### SG-E1 / SG-W1 / SG-W1A

- **DIN-RAIL** MOUNTING ACCORDING TO EN60715.
- **AC** MAINS POWER SUPPLY.
- **RS485** SERIAL COMMUNICATION.
- **IR** SERIAL COMMUNICATION (2 PORTS).
- **ETHERNET** COMMUNICATION (only for SG-E1).
- **WI-FI** COMMUNICATION.
- **PULSE INPUT** AND **TEMPERATURE SENSOR INPUT**.
- **SG-W1A** CAN ONLY OPERATE WITH AN EXTERNAL ANTENNA.
- **SMA** MALE CONNECTOR (only for SG-W1A)

## FEATURES

- AC mains power supply.
- Nominal supply voltage ( $U_n$ ) from 85 V to 265 V AC or 85 to 300 V DC.
- Nominal frequencies 50 Hz and 60 Hz.
- Multifunctional front green (operational mode), red (error and upgrade) and orange (provisioning mode) LED.
- RS485 serial communication.
- IR serial communication (2 ports).
- Wi-Fi communication (can operate with or without an external antenna).
- Ethernet communication (valid only for SG-E1)
- 1-DIN rail width mounting communication gateway according to EN 60715.
- Pulse and temperature input.
- SG-W1A can only operate with an external antenna.
- SMA male connector (*only for SG-W1A*)


## DESCRIPTION

The SG series of smart gateways are intended to connect various equipment into communication network. The gateway has built-in two optical (IR) communication ports and the RS485 serial communication with the MODBUS protocol. RS485 communication enables data transmission and consequently the connection of communication gateway into the RS485 network and communication with various equipment, consisting of RS485 communication (e.g. energy meters, latching switches, power monitoring devices, etc.), via MODBUS.

The SG series also consist of pulse input and temperature sensor (Pt1000) input.

The SG-W1 version is equipped with Wi-Fi communication. This type also has an alternative version with an external antenna (SG-W1A).

The SG-E1 version is equipped with Ethernet communication. Activation of Wi-Fi communication (via parameter) is also possible with this device, but in that case, the Ethernet will not be active on RJ45.

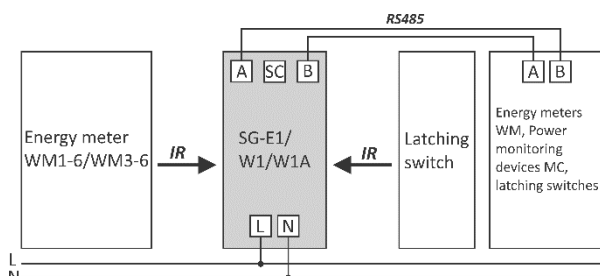


**Figure 1:** Diagram of various devices wired to SG.

## INSTALLATION

The SG series are intended only for DIN-rail mounting.

The SG series should be connected to power supply voltage. Two IR communication ports are assembled into the gateway, one on each side. The left one communicates with energy meter, the right one is meant to connect to the latching switch.

**NOTE:** For proper operation of the IR communication, avoid a powerful external source of light.



**Figure 2:** Diagram of pulse input.

The SG series could be connected to pulse input and to temperature sensor (Pt1000) input.


### Connection of modules:

The gateways can be equipped with different modules. Table below is showing equipped combinations.


#### Terminals

| Power supply        | N       | L       |
|---------------------|---------|---------|
| RS485 communication | A       | SC B    |
| Pulse input         | Pulse - | Pulse + |
| Temperature sensor  | Pt1000  | Pt1000  |

## DIMENSIONAL DRAWINGS

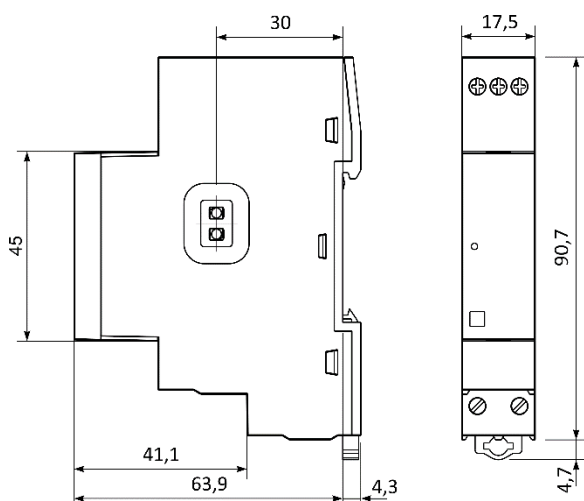

**Figure 3:** Dimensional drawing of SG-W1 and E1

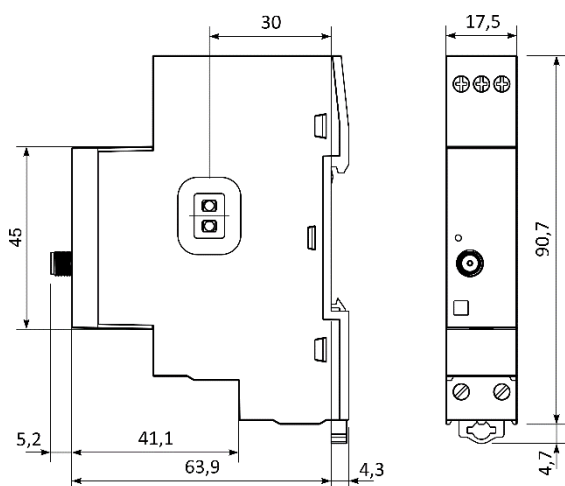

**Figure 4:** Dimensional drawing of SG-W1 with an external antenna

## TECHNICAL DATA

Rail mounting according DIN EN 60715.

### Mechanical characteristics of input:

#### Main inputs

- Contact capacity: 0.5 mm<sup>2</sup> ... 3 mm<sup>2</sup>
- Connection screws: M3
- Max torque: 0.5 Nm
- Length or removed isolation: 6 mm

#### RS485 module

- Contact capacity: 0.5 mm<sup>2</sup> ... 3 mm<sup>2</sup>
- Connection screws: M3
- Max torque: 0.5 Nm
- Length or removed isolation: 6 mm

### Power Supply input:

- Nominal voltage  $U_n$ : from 85 V to 265 V AC or 85 V to 300 V DC
- Power consumption: < 3 W
- Nominal frequency  $f_n$ : 50 Hz and 60 Hz
- Length of removed isolation: 6 mm

### LED:


- Colour: green (operational mode)  
red (error and upgrade)  
orange (provisioning mode)

### Wi-Fi:

- Protocols: 802.11 b/g/n
- Data rate: 150 Mbps
- Adjustable transmitting power: 20.5 dBm

### IR serial communication:

- Type: IR
- Speed: 19200 bit/s
- Frame: 8, N, 1
- Protocol: MODBUS RTU

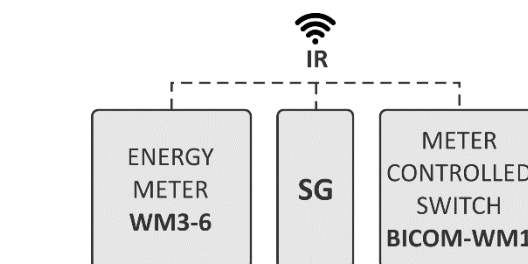

IR serial communication feature is also intended for communicating with our other devices such as WM3-6, WM1, ...

### RS485 Serial communication:

- Type: RS485
- Speed: 1200 bit/s to 115.200 bit/s (default 115.200 bit/s)
- Frame: 8, N, 1
- Protocol: MODBUS RTU

### Ethernet (only for SG-E1):

- Compliant with IEEE 802.3/802.3u (Fast Ethernet)
- Compliant with ISO 802-3/IEEE 802.3 (10 BASE-T)

### Digital input:

- Rated voltage: 230 V (-20 %...+15 %)
- Input resistance: 450 kΩ

### Temperature sensor (Pt1000) input:

- Measuring method: two wire connection
- Input range with programmable ratings: 200 Ω - 10 kΩ
- RTD sensors limit values: ≤ 1 V
- Measuring voltage: 100 K
- Minimum temperature range: 400 Ω (1000 Ω -> 1400 Ω)
- Minimum differential resistance: < 10 Ω per lead
- Lead resistance: < 0.5 VA
- Consumption: < 0.5 VA

### Safety and ambient conditions:

According to standards for IEC 60950.  
Temperature and climatic condition according to EN 62052-11.

|                       |                                   |
|-----------------------|-----------------------------------|
| Dust/water protection | IP50                              |
| Operating temperature | -25 °C ... +55 °C                 |
| Storage temperature   | -40 °C ... +70 °C                 |
| Enclosure             | self-extinguish, complying UL94-V |

### EU DIRECTIVES CONFORMITY:

EU Directive on Measuring Instruments **2014/32/EU**.  
EU Directive on EMC **2014/30/EU**.  
EU Directive on LDV **2014/35/EU**.  
EC Directive WEEE **2002/96/EC**.  
EU RED Directive **2014/53/EU**

### DISPOSAL




It is forbidden to deposit electrical and electronic equipment as municipal waste.  
The manufacturer or provider shall take waste equipment free of charge.

### ORDERING CODE

|              |        |                                                                            |
|--------------|--------|----------------------------------------------------------------------------|
| 022459160000 | SG-W1  | SG-W1 communication gateway, IR, RS485, Wi-Fi, PI, Pt1000                  |
| 022459161000 | SG-E1  | SG-E1 communication gateway, IR, RS485, Ethernet, PI, Pt1000               |
| 022459164000 | SG-W1A | SG-W1 communication gateway, IR, RS485, Wi-Fi external antenna, PI, Pt1000 |

### DICTIONARY:

|                    |                                                  |
|--------------------|--------------------------------------------------|
| <i>PI</i>          | <i>Pulse input</i>                               |
| <i>MODBUS/DNP3</i> | <i>Industrial protocol for data transmission</i> |
| <i>AC</i>          | <i>Alternating quantity</i>                      |
| <i>IR</i>          | <i>Infrared (optical) communication</i>          |
| <i>Pt1000</i>      | <i>Temperature sensor</i>                        |
| <i>Ethernet</i>    | <i>IEEE 802.3 data layer protocol</i>            |

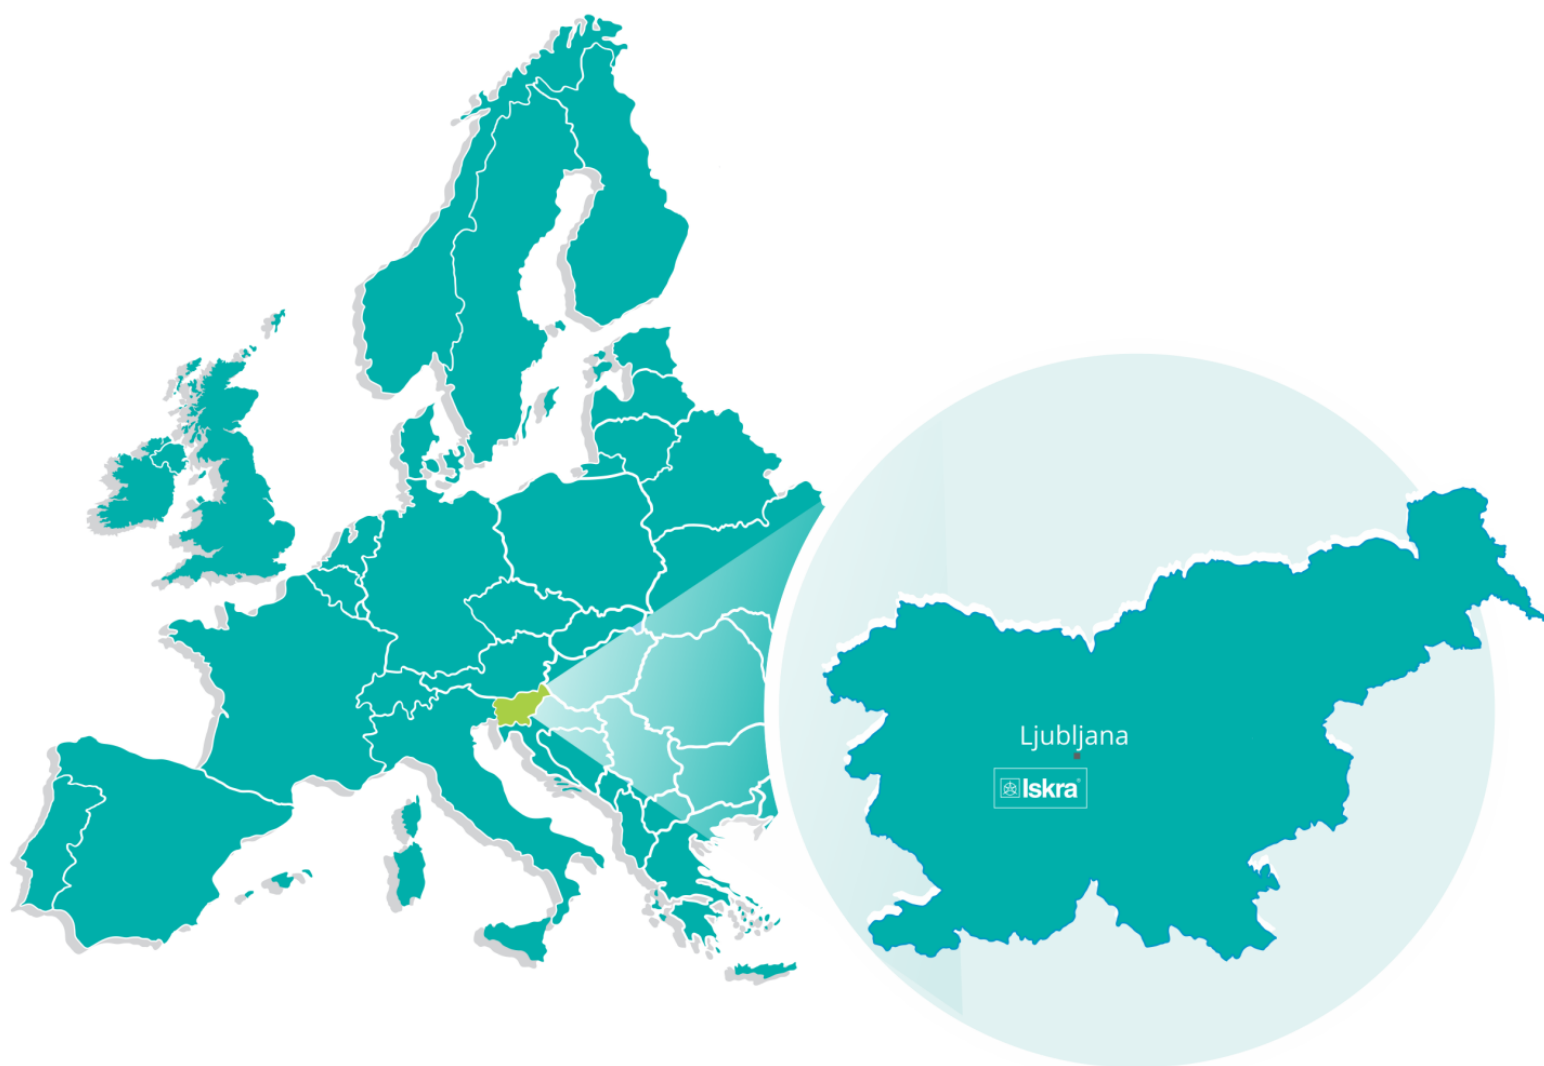

**Iskra, d.o.o.**  
**BU Ljubljana**  
 Stegne 21  
 SI-1000, Ljubljana  
 Phone: +386 1 513 10 00

**Iskra, d.o.o.**  
**BU Capacitors**  
 Vajdova ulica 71  
 SI-8333, Semič  
 Phone: +386 7 38 49 200

**Iskra, d.o.o.**  
**BU MIS**  
 Ljubljanska c. 24a  
 SI-4000, Kranj  
 Phone: +386 4 237 21 12

**Iskra, d.o.o.**  
**BU Batteries & Potentiometers**  
 Šentvid pri Stični 108  
 SI-1296, Šentvid pri Stični  
 Phone: +386 1 780 08 00

**Iskra, d.o.o.**  
**BU Electroplating**  
 Glinek 5  
 SI-1291, Škofljica  
 Phone: +386 1 366 80 50

**Iskra IP, d.o.o.**  
 Vajdova ulica 71  
 SI-8333, Semič  
 Phone: +386 7 384 94 54

**Iskra STIK, d.o.o.**  
 Ljubljanska cesta 24a  
 SI-4000, Kranj  
 Phone: +386 4 237 22 33

**Iskra Lotrič, d.o.o.**  
 Ljubljanska c. 24a  
 SI-4000, Kranj  
 Phone: +386 4 237 21 12

**Iskra ODM, d.o.o.**  
 Ljubljanska c. 24a  
 SI-4000, Kranj  
 Phone: +386 4 237 21 12

**Iskra Tela L, d.o.o.**  
 Omladinska 66  
 78250, Laktaši  
 Phone: +387 51 535 890

**Iskra Sistemi - M dooel**  
 Ul, Dame Gruev br. 16/5 kat  
 1000, Skopje  
 Phone: +389 75 444 498

**Iskra Commerce, d.o.o.**  
 Hadži Nikole Živkovića br. 2  
 11000, Beograd  
 Phone: +381 11 328 10 41

**Iskra Hong Kong Ltd.**  
 33 Canton Road, T.S.T.  
 1705, China HK City  
 Phone: +852 273 00 917



**Iskra, d.o.o.**  
 Stegne 21  
 SI-1000 Ljubljana, Slovenia

Phone: +386 (0) 1 513 10 00  
[www.iskra.eu](http://www.iskra.eu)